


iM0892

~ 10bit color LVDS Signal Generator P.W.B ~

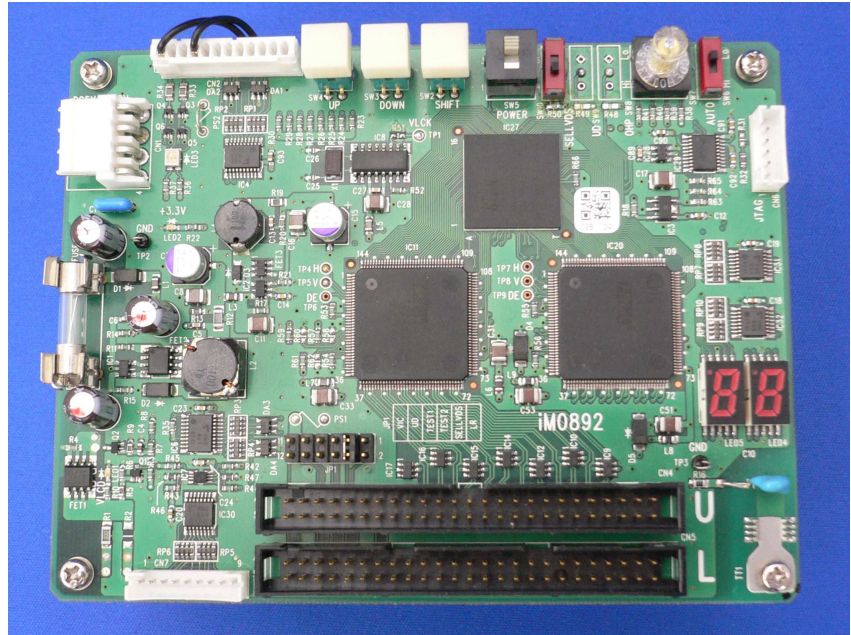

Equipment specification

Item	Detail
Operating temperature range	0 - 70 °C
Storage temperature range	0 - 85 °C
Operating humidity range	20 - 80 % RH (Non-condensing)
Body Dimensions	140 (W) × 102 (D) × 33 (H) (does not include protrusions)
Dot Clock Frequency	Single clock 20MHz - 135.0MHz Dual clock 20MHz - 170.0MHz Quad clock 20MHz - 170.0MHz
Output Signals	LVDS 10 bit output (Single / Dual / Quad)
Input / Output Voltage	VLCD 12.0V (max. 4A)
Resolution	Max. 2560 × 1080

I.S.X Corporation

〒532-0033

5-8-20, Niiitaka,
Yodogawa-Ku, Osaka,
Japan

TEL 06-4807-6636

FAX 06-4807-6669

sales@isx.co.jp

